

CATALOGUE

DESIGN & MANUFACTURING



Golderos
Masters of cold



100% MADE IN GOLDEROS



Beer coolers


Coils



Agitator pumps



Air cooling evaporators



Steel structures







GOL DE ROS

SINCE 1970

COOLING BEER & MORE



COOLERS

Customized, reliable coolers suitable for:

- Pubs & bars
- Events
- Carbonators
- Counter coolers

COILS

Included in our coolers or sold as spare parts:

- Rounded
- Squared
- Helicoidal

PUMPS

Included in our coolers or sold as spare parts:

- 3 exits
- Up to 10 meters
- Wide range

COOLERS

PUBS & BARS

EVENTS & FESTIVALS

COUNTER COOLERS

CARBONATORS

MORE SOLUTIONS





V 50

- **682X375X375**
- 406 Watts
- Electric/digital thermostat
- 13 kg icebank
- 77 liters /hour
- R-290 gas
- Ferritic/skinplate finish

COOLERS

V 75

- **717X425X425**
- 406 Watts
- Electric/digital thermostat
- 15 kg icebank
- 80 liters /hour
- R-290 gas
- Ferritic/skinplate finish



V 100

- **717X430X430**
- 656 Watts
- Electric/digital thermostat
- 19 kg icebank
- 118 liters /hour
- R-290 gas
- Ferritic/skinplate finish



V 200

- **898X495X495**
- 904 Watts
- Electric/digital thermostat
- 40 kg icebank
- 182 liters /hour
- R-290 gas
- Ferritic/skinplate finish

COOLERS

V 300

- **898X495X495**
- 1637 Watts
- Electric/digital thermostat
- 50 kg icebank
- 218 liters /hour
- R-290 gas
- Ferritic/skinplate finish
- **Double evaporator**



V 500

- **990X557X557**
- 1913,4 Watts
- Electric/digital thermostat
- 60 kg icebank
- 429 liters /hour
- R-452 A gas
- Ferritic/skinplate finish
- **Double evaporator**





HORIZONTAL


Horizontal versions of our coolers are available.

- H 50
- H 100
- H 200
- H 300
- H 500

COOLERS

SANA 150

- 768x1301x546
- 2 independent cooling units
- Double evaporator
- 2 compressors (1HP)
- Up to 10x23m coils
- 2 pumps with 3 exits
- 75 Kg ice bank
- Magnelli finish

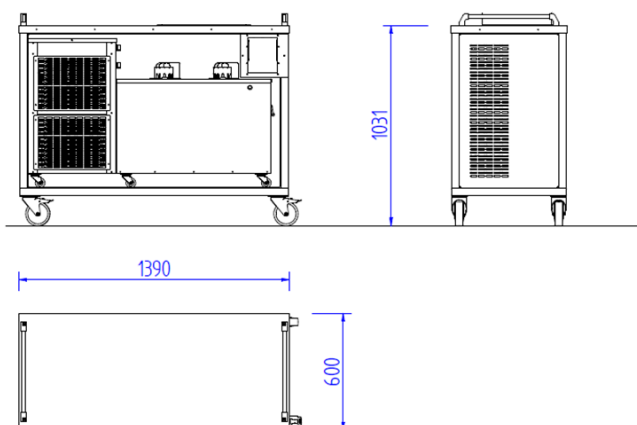

SANA BAR

- 1031x1390x600
- Ready for big events





EVENT V 100

- **900X450X450**
- 656 Watts
- Electric/digital thermostat
- 20 kg icebank
- 120 liters /hour
- R-290 gas
- Ferritic finish

COOLERS

EVENT V 200

- **1005X500X500**
- 904 Watts
- Electric/digital thermostat
- 40 kg icebank
- 182 liters /hour
- R-290 gas
- Ferritic finish



EVENT V 300

- **1005X500X500**
- 1637 Watts
- Electric/digital thermostat
- 50 kg icebank
- 218 liters /hour
- R-290 gas
- Ferritic/skinplate finish



G 400

- **1015x500x500**
- 1636 Watts
- Electric/digital thermostat
- 40 kg icebank
- 218 liters /hour
- R-290 gas
- 1,5mm thick ferritic finish

COOLERS

G 500

- **1015x500x500**
- 1636 Watts
- Electric/digital thermostat
- 40 kg icebank
- 218 liters /hour
- R-290 gas
- 1,5mm thick ferritic finish



PORTABLE COOLERS

- Up to 3 lines per unit
- Fast dispensing taps available
- All-included kits available



PICKY

- **440x215x300**
- 303 Watts
- Electric/digital thermostat
- 5 kg icebank
- 25 liters /hour
- R-290 gas
- Ferritic/skinplate finish

COOLERS

GOLDY

- **540x315x355**
- 405 Watts
- Electric/digital thermostat
- 11 kg icebank
- 50 liters /hour
- R-290 gas
- Ferritic/skinplate finish



COUNTER COOLERS

- Up to 3 lines per unit in Goldy
- Fast dispensing taps available
- All-included kits available
- The Goldy cooler can be used as an under counter unit



CARBONATORS



Inline professional carbonation systems that delivers unlimited capacity of sparkling water



Adjustable level of carbonation, up to 3,5 volumes of CO₂ [7g/L]

Inside over-counter units [C-range] or inside standard coolers
→ ALL DRINKS solutions

Highest level of hygiene and cleanliness

Compatible with any CO₂ cylinders around the world

Plug and play system, easy to install and service. Just connect it to a cold-water source.


Instant carbonation, no waiting time



CARBONATORS INTEGRATED IN OUR STANDARD RANGE

DISPENSE SPARKLING WATER ALONG WITH MORE PRODUCTS

ALL DRINKS IN ONE COOLER

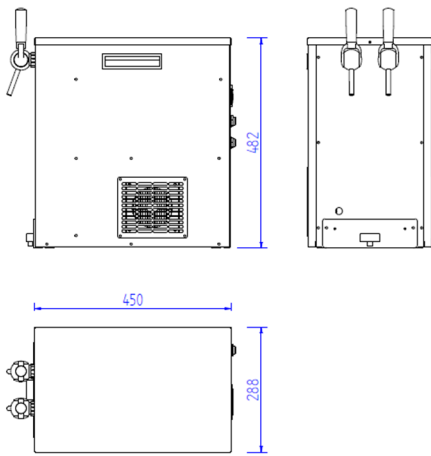





C-10

- 446 Watts
- Electric thermostat
- 5 kg icebank
- 8 liters tank capacity
- 25 liters /hour
- R-290 gas
- Inline carbonation

C- RANGE

C-25 H

- 446 Watts
- Electric thermostat
- 11 kg icebank
- 20 liters /hour
- R-290 gas
- Inline carbonation

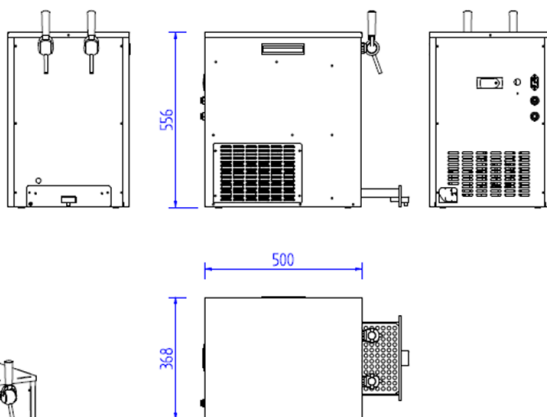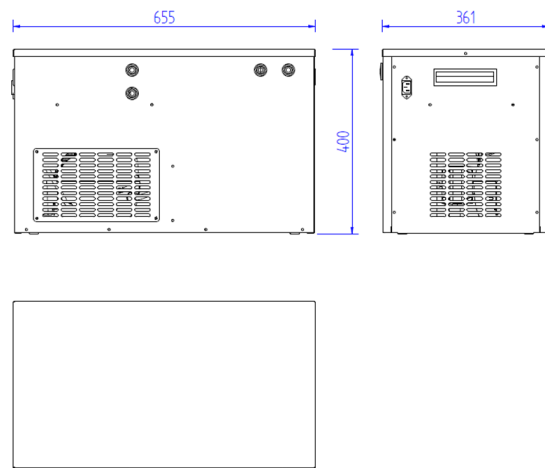

C- 25

- 446 Watts
- Electric thermostat
- 11 kg icebank
- 20 liters /hour
- R-290 gas
- Inline carbonation



BESPOKE COILS

- UP TO 10 COILS PER KIT
- Coils in AISI 304 or AISI 316 Stainless Steel

DIAMETERS

7 mm Ø

8 mm Ø

$\frac{3}{8}$ Ø



HELICOIDAL



SQUARED



ROUNDED

PUMPS





55 W

- Performance: 6 m
- External rotor
- Pump: GOLDEROS PUMP GOL 98
- Exits: 3
- Stages: 1



85 W

- Performance: 7 m
- External rotor
- Pump: GOLDEROS PUMP GOL 98
- Exits: 3
- Stages: 2 "HIGH PRESSURE"

PUMPS



60 W

- Performance: 7 m
- Golderos motor G8 Inox
- Pump: GOLDEROS PUMP GOL 98
- Exits: 3
- Stages: 1



80 W

- Performance: 8 m
- Golderos motor G8 Inox
- Pump: GOLDEROS PUMP GOL 98
- Exits: 3
- Stages: 2 "HIGH PRESSURE"



120 W

- Performance: 9 m
- External rotor
- GOLDEROS PUMP GOL 98
- Exits: 3
- Stages: 1



55 W

- Performance: 7 m
- External rotor
- GOLDEROS PUMP GOL 92
- Exits: 3
- Stages: 1

PUMPS





**MORE
SOLUTIONS**

PORTABLE TANK CHILLER



- **300x355x955**
- 10 cc Compressor
- Self-priming pump
- Digital thermostat
- Waterexchanger (glycol)
- Condenser 9x3
- 2 exits
- Skinplate finish

TANK SOLUTIONS

MULTIPLE TANK CHILLER

- Multiple probes
- Up to 3 tanks cooled parallel
- 3 Exti pump
- R-290 gas
- Ferritic/skinplate finish



SHELF TANK CHILLER

- **283x355x578**
- No-coils version
- Digital thermostat (glycol)
- Tropicalized
- Agitator pump included
- 5/8" water exit
- 286x412x580
- Skinplate finish





COCKTAIL COOLER

- **275x570x340**
- Digital thermostat
- 4 coils
- Glycol cooling
- Waterexits to cool the tower

& MORE

KEG COOLERS

- Digital thermostat
- Top version: **350x670x445**
- Side version: **793x403x411**
- **7,7 cc or 5,7 cc compressor**



EVENT BARS

- Bespoke bars for events

& MORE





KEEP IT COOL



CHARTS

VERTICAL

	PICKY	GOLDY	V-50	V75	V90	V-100	EVENT V-100
REFERENCE	1000001000	1001001000	1002001000	1003001000	1004000000	1005001000	1026001002
MEASURES (high x width x depth))	440X215X300	540X315X355	682X375X375	717X425X425	720X290X430	717X430X430	900X450X450 S/C
HORSEPOWER HP	1/5	1/5	1/5	1/5	1/5	1/4+	1/4+
A VAILABLE ANGLE PHASE VOLTAGE	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
COMPRESSOR (CC)	4 (r290a) 4 (r513a)	5,7	5,7	5,7	5,7	7,48	7,48
POWER/PERFORMANCE ECP - 10 th (W)	303,4 (r290a) 140 (r513a)	404,5	404,5	404,5	404,5	655,8	655,8
REFRIGERANT	R513A/R290A	R290	R290	R290	R290	R290	R290
TANK CAPACITY (LITERS)	8	20	30	35	25	42	45
ICE BANK (KG)	5	11	13	15	12	19	20
LITERS PER HOUR	25	50	77	80	TAP FREEZING	118	120
AGITATOR PUMP:	GOLDEROS G8	GOLDEROS G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8
PUMP:	GOL 92	GOL 92	GOL 98	GOL 98	GOL 98	GOL 98	GOL 98
EXITS:	1	1	3	3	3	3	3
STAGES:	1	1	1	1	1	1	1
MAXIMUM NUMBER OF COILS	1	3	4	4	0	6	1
EVAPORATOR	COOPER 5/16	COOPER 3/8	COOPER 3/8	COOPER 3/8	COOPER 3/8	COOPER 3/8	COOPER 3/8
HANDLE	NO	PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	PVC	STAINLESS STEEL/PVC	INOX
GRILLS	STEEL	STEEL	STEEL ZINCADO/PVC	STEEL ZINCADO	PVC	STEEL ZINCADO/PVC	STEEL ZINCADO/PVC
CONEXION BOX	STEEL	STEEL	PVC	PVC	STEEL	PVC	PVC
THERMOSTAT	ELECTRONIC	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL	DIGITAL	ELECTR/DIGITAL	ELECTRONIC
GLYCOL	NO	YES	YES	YES	YES	YES	YES
WEIGHT(kg)	23	28	30	35	35	36	42
POWER CONSUMPTION (W)		350	350	350	350	510	510



VERTICAL

	V150	V-200	EVENT V 200	V220	V250	V-300	V-500
REFERENCE	1007001000	1008001000	1027001002	1009001000	1012000000	1013001000	1014001000
MEASURES (high x width x depth))	760X446X446	898X495X495	1005X500X500 S/C	895X495X495	898X495X495	898X495X495	990X557X557
HORSEPOWER HP	3/8	3/8	3/8	3/8	1/2	1	1, 1/4
AVAILABLE ANGLE PHASE VOLTAGE	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230-400V/50Hz
COMPRESSOR (CC)	12,55	12,55	12,55	12,55	17,69	21	35
POWER/PERFORMANCE ECP - 10 th (W)	904,2	904,2	904,2	904,2	1200	1636,8	1913,4
REFRIGERANT	R290	R290	R290	R290	R290	Rr290a	R-452A
TANK CAPACITY (LITERS)	45	72	72	72	76	72	110
ICE BANK (KG)	22	40	40	40	45	50	60
LITERS PER HOUR	150	182	182	182	185	218	429
AGITATOR PUMP:	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8
PUMP:	GOL 98	GOL 98	GOL 98	GOL 98	GOL 98	GOL 98	GOL 98
EXITS:	3	3	3	3	3	3	3
STAGES:	1	2	1	2	2	2/3	3
MAXIMUM NUMBER OF COILS	6	10	1	10	10	10	10
EVAPORATOR	COOPER 3/8	COOPER 3/8	COOPER 3/8	COOPER 3/8	COOPER 3/8	HIGH PERFORMANCE DOUBLE EVAPORATOR	HIGH PERFORMANCE DOUBLE EVAPORATOR
HANDLE	INOX	STAINLESS STEEL/PVC	INOX	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC
GRILLS	STEEL ZINCADO	STEEL ZINCADO/PVC	STEEL ZINCADO/PVC	STEEL ZINCADO/PVC	STEEL ZINCADO/PVC	STEEL ZINCADO/PVC	STEEL
CONEXION BOX	PVC	PVC	PVC	PVC	PVC	PVC	PVC
THERMOSTAT	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTRONIC	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL
GLYCOL	YES	YES	YES	YES	YES	YES	YES
WEIGHT(Kg)	40	54	58	53	54	60	70
POWER CONSUMPTION (W)	800	800	800	800	800		




HORIZONTAL

	H10	H50	H100	H200	H250	H300	H500
REFERENCE	1016001000	1019001000	1020000001	1022000002	1025000000	1023001000	1024001000
MEASURES (high x width x depth))	290X440X300	420X706X375	440X730X430	580X880X495	580X880X495	580X880X495	680X1115X557
HORSEPOWER HP	1/5	1/5	1/4+	3/8	3/8	1	1 1/4
A VAILABLE ANGLE PHASE VOLTAGE	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230-400V/50Hz
COMPRESSOR (CC)	4 (r290a) 5,08(r513a)	5,7	7,48	12,55	17,69	21	35
POWER/PERFORMANCE ECP - 10º (W)	303,4 (r290a) (r513a)	404,5	655,8	904,2	1200	1636,8	1913,4
REFRIGERANT	R513A/R290A	R290	R290	R290	R290	R290a	R452A
TANK CAPACITY (LITERS)	8	30	42	72	76	72	110
ICE BANK (KG)	5	13	19	40	45	40	60
LITERS PER HOUR	TAP FREEZING	77	118	182	185	218	429
AGITATOR PUMP:	GOLDEROS G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8	EXTERNAL ROTOR/G8
PUMP:	GOL 92	GOL 98	GOL 98	GOL 98	GOL 98	GOL 98	GOL 98
EXITS:	1	3	3	3	3	3	3
STAGES:	1	1	1	1	2	2	3
MAXIMUM NUMBER OF COILS	0	4	6	10	10	10	10
EVAPORATOR	COOPER 5/16	COOPER 3/8	COOPER 3/8	COOPER 3/8	COOPER 3/8	HIGH PERFORMANCE DOUBLE EVAPORATOR	HIGH PERFORMANCE DOUBLE EVAPORATOR
HANDLE	PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC	STAINLESS STEEL/PVC
GRILLS	STEEL	STEEL ZINCADO	STEEL ZINCADO	STEEL ZINCADO	STEEL ZINCADO	STEEL ZINCADO	STEEL
CONEXION BOX	STEEL/PVC	PVC	PVC	PVC	PVC	PVC	PVC
THERMOSTAT	DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL	ELECTR/DIGITAL
GLYCOL	YES	YES	YES	YES	YES	YES	YES
WEIGHT(kg)	25	35	40	58	58	62	70
POWER CONSUMPTION (W)		350	510	800	800		



MASTERS OF COLD




Made
in **EU**



KEEP IN TOUCH

golderos.com
comercial@golderos.com

C/Alcarria 5, Coslada
28823
Madrid [Spain]

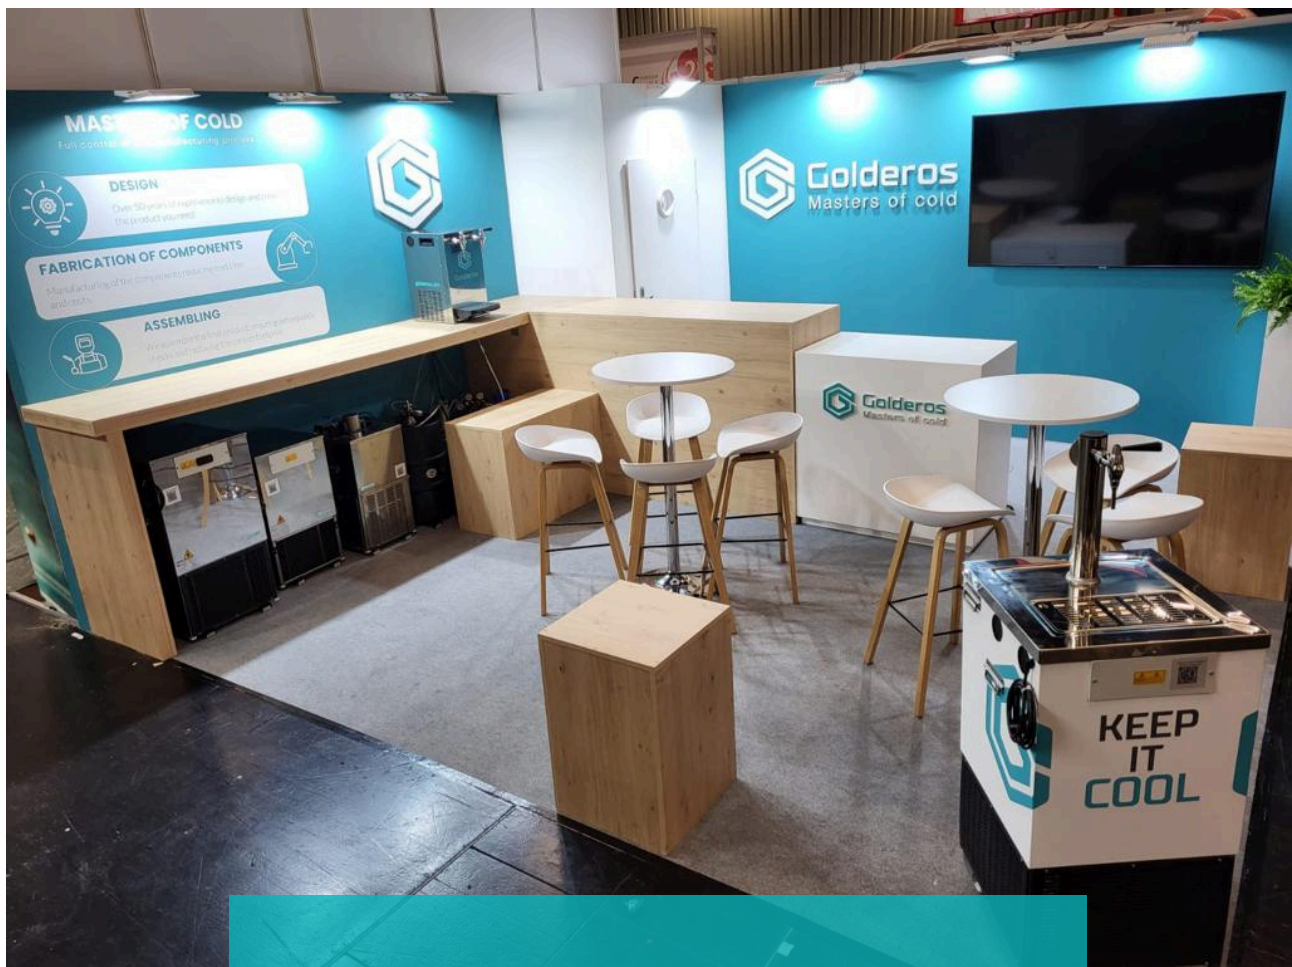

MADE IN SPAIN